
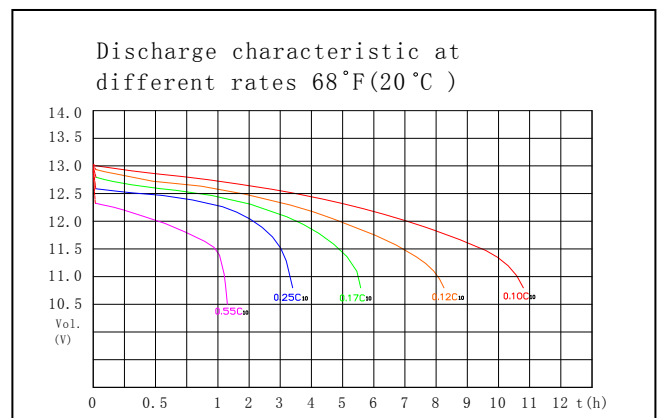
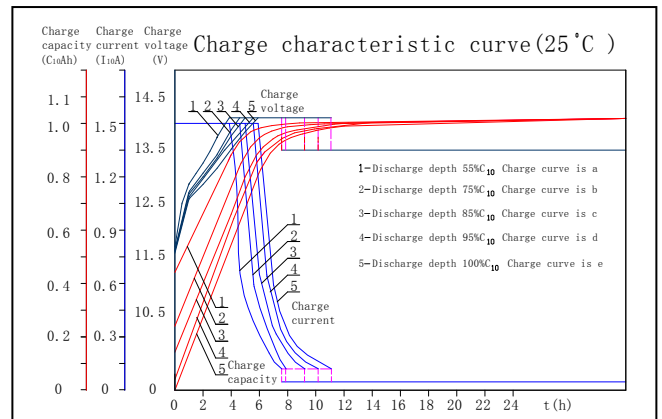
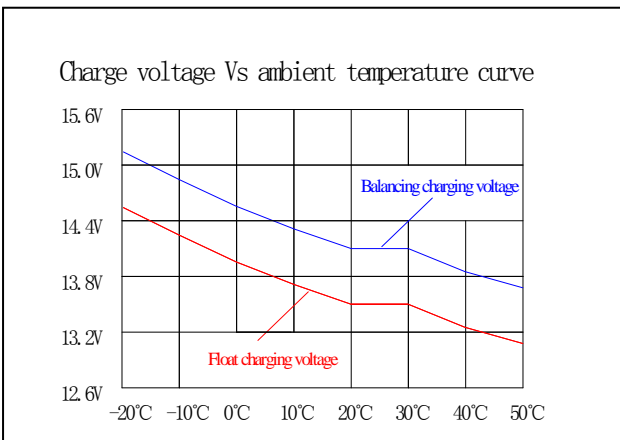


Specifications

| | | |
|-------------------------------|------------------|--------|
| Nominal voltage | | 12V |
| Rated capacity (10 hour rate) | | 200Ah |
| Dimension | Length (L) | 513mm |
| | Width (W) | 294mm |
| | Height (h) | 214mm |
| | Total height (H) | 224mm |
| Approx. mass | | 82.5Kg |

Main technical parameters And Environment requirements

| | |
|--|--|
| Environment temperature | -20°C ~ 50°C |
| Environmental temperature for best utilization | 20°C |
| Float charging voltage | 13.5V/unit |
| Balancing charging voltage | 14.1V/unit |
| Temperature adjustment coefficient | -18mV/°C/unit |
| Cycle life | ≥1000 times (80% DOD) |
| Max charging current | 0.20C ₁₀ A |
| Design service life | 10years(20°C) |
| Floating service life | ≥6years(20°C) |
| Self-discharge rate | Less than 40% after 2-year storage at 20°C |
| Recover performance after deep discharge | The battery can be recharged to 95% of the rated capacity after 12-hour deep discharge |

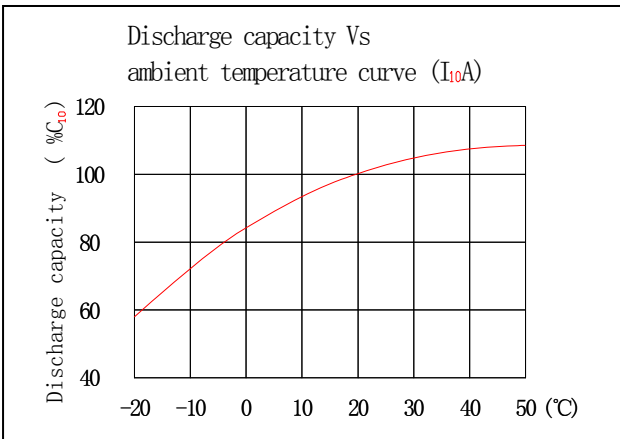

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact Solar Guru for the latest information.