



CP Series



IQNet
ISO 9001
No.4400/200315564

AGM VRLA INDUSTRIAL BATTERIES

Specifications ▶▶▶▶

General Purpose 5 Year Design Life Series

6 Volt Units • Capacities 1.2 Ah up to 14 Ah

12 Volt Units • Capacities 0.7 Ah up to 25 Ah



Features

Maintenance Free Valve Regulated Lead Acid Design

Can be operated in horizontal or vertical position

Non-spillable - Can be used in office equipment

Manufactured under a certified ISO9001 quality system

ActivFire approved for use in fire panels

Meets IATA A67 Air Freight specification





CP General Purpose 5 year Design Life Batteries

Applications: Emergency lighting, Fire & Security, UPS, Medical Equipment, Control Equipment, Toys.


Comply with AS1603.4 - 1987 Appendix G for use in fire detection and alarm systems

General Specifications

Battery Model No	Nominal Voltage (Volts)	Nominal Capacity @ 20 Hr (Ah)	Length (mm)	Width (mm)	Container Height (mm)	Height (overall) (mm)	Weight (Kg)	Terminal Type
CP612	6	1.2	97.0	24.0	52.0	58.0	0.31	F1
CP625	6	2.5	66.0	33.0	97.0	104.0	0.61	F1
CP632	6	3.2	134.0	35.0	61.0	67.0	0.71	F1
CP645	6	4.5	70.0	47.0	101.0	107.0	0.85	F1
CP650S Torch	6	4.6	67.0	67.0	96.0	109.0	0.9	Spring
CP656	6	5.6	70.0	47.0	101.0	107.0	0.96	F1
CP670	6	7.0	151.0	34.0	94.0	100.0	1.36	F1
CP6120	6	12.0	151.0	50.0	94.0	100.0	2.10	F1
CP6140T	6	14.0	108.0	71.0	140.0	140.0	2.37	F1 & F2 **
CP1207	12	0.7	96.0	25.0	62.0	62.0	0.34	Plug
CP1212	12	1.2	97.0	43.0	52.0	58.0	0.61	F1
CP1220C	12	1.6	144.0	24.0	65.0	65.0	0.60	Pressure Contacts
CP1223	12	2.3	178.0	35.0	61.0	67.0	0.99	F1
CP1223C	12	2.0	182.0	24.0	61.0	61.0	0.71	Pressure Contacts
CP1229	12	2.9	79.0	56.0	99.0	103.0	1.10	F1
CP1232	12	3.2	134.0	67.0	61.0	67.0	1.40	F1
CP1245	12	4.5	90.0	70.0	101.0	107.0	1.72	F1
CP1270	12	7.0	151.0	65.0	95.0	101.0	2.66	F1
CP12100S	12	10.0	151.0	65.0	111.0	117.0	3.25	F1
CP12120	12	12.0	151.0	98.0	95.0	101.0	4.2	F1
CP12170	12	17.0	181.0	77.0	167.0	167.0	5.7	B1
CP12250	12	25.0	175.0	166.0	125.0	125.0	9.2	F13

** Lead kits available separately.

Terminal Type

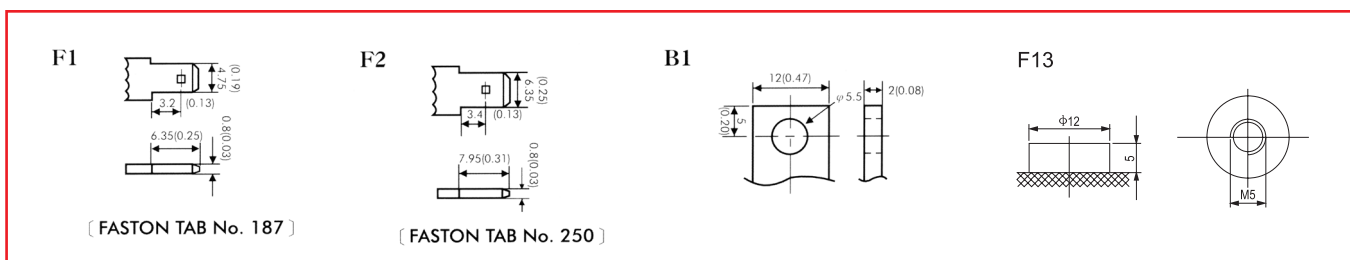

Battery Charging:

6 Volt Units	Float Voltage	6.8 - 6.9 Volts @ 25°C
12 Volt Units	Float Voltage	13.6 - 13.8 Volts @ 25°C

YHI POWER PTY LTD (A member of the YHI Group)



Head Office (Australia)
 1044 – 1046 Canley Vale Road,
 Wetherill Park, NSW 2164
 Ph : (02) 8787 9218
 Fax : (02) 9756 4066
 Email : sales@yhipower.com.au
 Website : www.yhipower.com.au

Melbourne Office

Ph : 0413 381 228

Brisbane Office

Ph : 0422 000 276