


Specifications

Nominal Voltage		12V
Rated Capacity (20 hour rate)		55AH
Dimension	Total Height (with terminals)	212mm(8.35inches)
	Height	208mm(8.19inches)
	Length	229mm(9.02inches)
	Width	138mm(5.43inches)
Weight		Approx.17.6kg (38.5lbs)


Discharge characteristics 77°F (25°C)

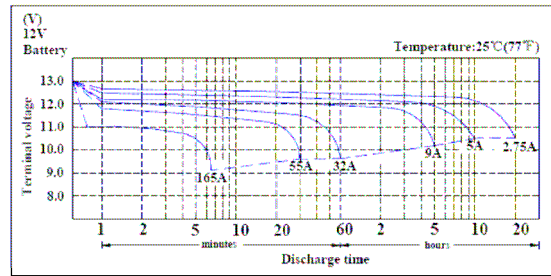

Characteristics

Capacity 77°F (25°C)	20 hour rate (2.75A to 10.5Volts)	55AH
	10 hour rate (5A to 10.5Volts)	50AH
	5 hour rate (9A to 10.2Volts)	45AH
Internal Resistance	Full charged 77°F (25°C)	8m Ω
Capacity affected by Temperature (20 hour rate)	104°F (40°C)	102%
	77°F (25°C)	100%
	32°F (0°C)	85%
Self-Discharge 77°F (25°C)	5°F (-15°C)	65%
	Capacity after 3 month storage	91%
	Capacity after 6 month storage	82%
Standard Terminal	Capacity after 12 month storage	64%
	Max. Discharge Current 77°F (25°C)	825A (5s)
	Cranking Performance	Cranking Amps (30-sec amps to 7.2V @ 32° F (0° C)
Cold Cranking Amps (30-sec amps to 7.2V @ 0° F (-18° C)		400A
Reserve Capacity (Minutes to 10.5V at 80°F (27°C)	@ 25Amps	85Min
	@ 75Amps	21Min
Charging (Constant Voltage)	Cycle	Initial Charging Current 11A Or Small 14.5V~14.9V/77°F (25°C)
	Float	13.6V~13.8V/77°F (25°C)

Duration of discharge vs. Discharge current

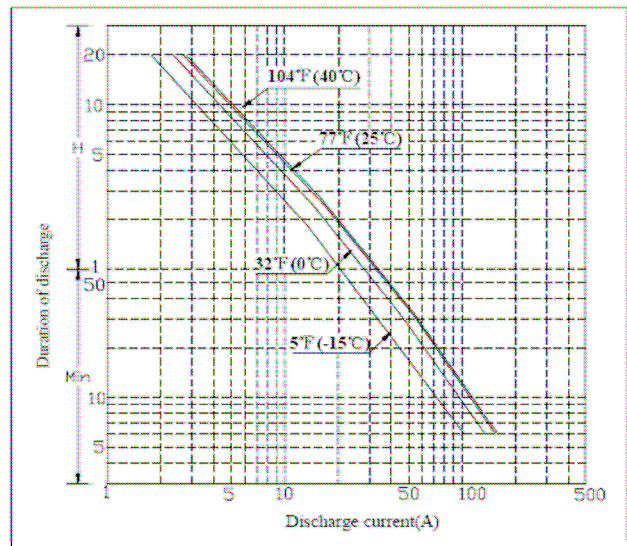

Constant Current Discharge Rating Amperes @ 77 °F (25°C)

Cut off voltage V/cell	15M	30M	45M	1H	2H	3H	5H	8H	10H	12H	20H	24H
1.75V	85	55	41	31.3	16.6	12.5	8.7	6.0	4.95	4.22	2.75	2.30

Newton Power

Deep Cycle Batteries

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and Battery designs/specification are subject to modification without notice. Contact YHI Power for latest information.